

## PG FLEX CABLE GLANDS



### Material

Body: PA 6 (Poyamide 6)  
 Cap: PA 6 (Polamide 6)  
 Seal: CR (Chloroprene Rubber)

### Flammability

V2 (According to UL 94)

### Protection Class


IP68 - 5 Bar (72.5 psi)

### Operating Temperature

Permanent: -20°C to +100°C (-4°F to +212°F)  
 Intermittent: -30°C to +150°C (-22°F to +302°F)

### Thread

ANSI B 1.20.1

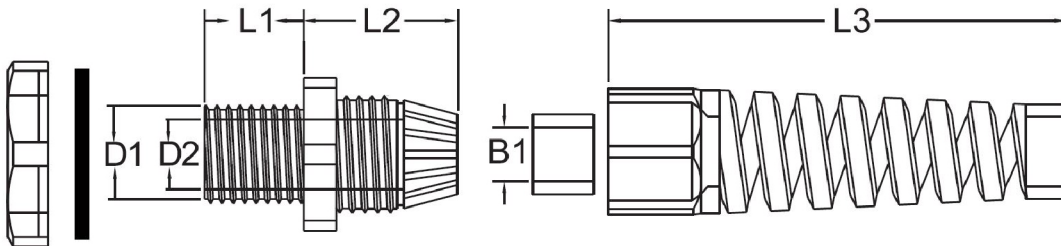

PG Flex Gland Specs (mm)

	D1	D2	B1	L1	L2	L3	Cable Range	Units/Bag
PG-7	12.5	8.5	6.2	8.8	21.1	53.3	3.5-6	50
PG-9	15.6	11.0	8.8	8.6	22.9	62.5	4-8	50
PG-11	18.4	13.9	10.1	9.7	23.9	74.9	5-10	50
PG-13.5	20.4	15.6	12.0	9.5	25.2	85.5	6-12	50
PG-16	22.4	17.8	14.4	10.2	26.7	96.2	10-14	50
PG-21	28.1	22.2	18.1	11.2	30.3	111.2	13-18	25