

NPT CABLE GLANDS



Material

Body: PA 6 (Poyamide 6)
 Cap: PA 6 (Polamide 6)
 Seal: CR (Chloroprene Rubber)

Flammability

V2 (According to UL 94)

Protection Class


IP68 - 5 Bar (72.5 psi)

Operating Temperature

Permanent: -20°C to +100°C (-4°F to +212°F)
 Intermittent: -30°C to +150°C (-22°F to +302°F)

Thread

ANSI B 1.20.1

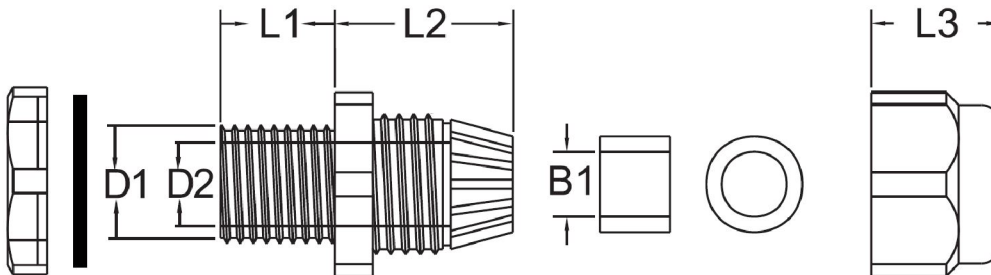

NPT Gland Specs (mm)

	D1	D2	B1	L1	L2	L3	Cable Range	Units/Bag
NPT-14	12.2	8.3	6.3	9.5	23.2	14.6	3-6.5	50
NPT-38-S	16.5	11.1	6.3	11.9	22.7	14.6	2-6	50
NPT-38	16.5	11.8	10.6	15.2	23.7	16.8	5-10	50
NPT-12-S	20.5	15.7	12.1	12.8	26.1	17.8	6-12	50
NPT-12	20.5	15.7	13.3	14.4	30.4	18.1	10-14	50
NPT-34	28.4	19.6	18.8	16.0	30.4	22.5	13-18	50
NPT-1	32.5	26.6	25.8	14.5	33.9	25.4	18-25	25
NPT-114	41.0	32.5	25.8	19.0	34.0	25.4	22-32	10
NPT-112	47.3	39.4	31.1	16.1	42.1	30.5	22-32	5
NPT-2	59.6	51.0	44.9	15.1	41.9	33.2	37-44	5